

Canon

Delighting You Always

imageRUNNER
2745 | 2735 | 2730 | 2725

Enhanced Usability, Intuitively Powerful

Designed for even more functionality.
The new imageRUNNER 2700 series
streamlines workflow with performance
crafted for modern offices.



Business Can Be Simple

PRINT UP TO **45** PAGES/MIN

7" COLOUR TOUCH PANEL

MOBILE PRINT READY

imageRUNNER 2700 SERIES

Usability That Goes Way Beyond

The new imageRUNNER 2700 monochrome series redefines usability. Packed with essential functions for modern offices, the series pairs utility with concise operability, offering a seamless print experience that is optimised for any workflow.



Interaction Just Got Better

The 2700 series upgrades your user experience through an intuitive interface. Boasting a 17.78 cm (7 inch) colour touch panel with multiple personalisation options, navigation is easy and convenient.

Set specific tasks with one-touch operations to keep workflow efficient. Users can stay productive by streamlining their operations.



Diverse Media Capabilities

Handle versatile print demands or in-house productions with wider media support. Print from various media types and paper weights, with a variety of finishes such as hole punch and ECO-staple.



LETTERHEAD



PUNCHED
PAPER



256 GSM



A5/A6R

More Ways to Connect

The series offers flexible and fuss-free ways to print your documents.

Wi-Fi Direct

Connect directly to the multi-function device via Wi-Fi direct to print on-the-go.



Mobile Apps


Manage your documents with Canon PRINT Business, Mopria and more.



YOU CAN DOWNLOAD FROM
APP STORE OR GOOGLE PLAY

USB Memory Media

Preview, print and store documents directly with the device via USB without using a computer.

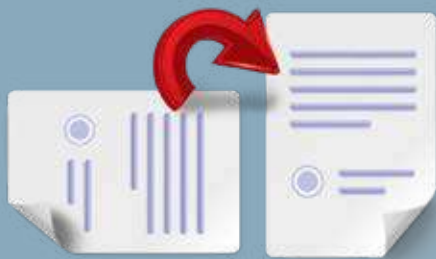

Smart Scanning Configuration

View and save scanned documents in the right orientation. The imageRUNNER 2700 series automatically determines height and width so your documents are always in the optimal readability.

Further preview your media on the colour display before printing or saving to ensure your documents and images are in the best presentation.

Robust Security

Keep your documents and information safe with the latest standards in security.

uniFLOW Online Express

Prevent unauthorised usage of the device by limiting users access with authentication. Track usage and manage cost with an intuitive dashboard.



Document Holding

Prints can be held until authentication is performed at the device, reducing chances of information leaks.



Encrypted PDFs

Protect your scanned documents by encrypting the digital data to prevent tampering.



SPECIFICATION

MAIN UNIT	
Machine Type	A3 Monochrome Laser Multifunctional
Core Functions	Print, Copy, Scan, Send and Optional Fax
Control Panel	17.78 cm (7 inch) TFT LCD WVGA Colour Touch Panel
Memory	2.0GB RAM
Storage	eMMC: 30GB
Interface Connection	Network: Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n) Others: Standard: USB 2.0 (Host) x2, USB 2.0 (Device) x1
Paper Supply Capacity (A4, 80g/m ² (gsm))	Standard: 1200 sheets Maximum: 2300 sheets (with Cassette Feeding Unit-AW1)
Paper Output Capacity (A4, 80g/m ² (gsm))	Standard: 250 sheets Maximum: 645 sheets (with Inner Finisher-L1 and Copy Tray-T2)
Supported Media Types	Main Body Cassette (Upper/Lower): Thin, Plain, Recycled, Colour, Heavy, Bond, Pre-Punched, Letterhead, PostCard Multi-purpose Tray: Thin, Plain, Recycled, Colour, Heavy, Bond, Pre-Punched, Letterhead, PostCard, Labels, Coated, Tracing
Supported Media Sizes	Upper Cassette: Standard size: A4, A5, A5R, A6R, B5 Custom Size: 105.0 x 148.0 mm to 297.0 x 215.9 mm Lower Cassette: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, COM 10 No. 10 ¹ , Monarch ² , DL ¹ ¹ : Required Envelope Attachment A Custom size: 105.0 x 148.0 mm to 304.8 x 457.2 mm
Supported Media Weights	Main Body Cassette (Upper/Lower): 52 to 256g/m ² (gsm) Multi-purpose Tray: 52 to 300g/m ² (gsm) ¹ : Supported paper weight with Media Adjustment Kit-A1: 60-300g/m ² (gsm) Duplex: 52 to 220g/m ² (gsm)
Warm-up Time (Quick start mode: ON)	4 s or less [*] [*] Time from device power on to when copy icon appears and is enabled to operate on the touch panel display. From Sleep Mode: 10 s or less
Dimensions (W x D x H)	With Platen Cover Type Z: 565.0 x 659.0 x 788.0 mm With Platen Cover-Y3: 565.0 x 659.0 x 788.0 mm With DADF(45/35ppm): 565.0 x 687.0 x 891.0 mm With DADF(30/25ppm): 565.0 x 693.0 x 877.0 mm
Installation Space (W x D)	Basic: 978 x 1089 mm (with Platen Cover-Y3 + right door & multi-purpose tray opened + paper cassette opened) Fully Configured: 1286 x 1116 mm (with DADF-BA1 + Inner Finisher tray max extended + Copy Tray-T2 max extended + paper cassette opened)
Weight Without toner	iR2745/2735: With Platen Cover-Y3: Approx. 60 kg With DADF-BA1: Approx. 66 kg iR2730/iR2725: With Platen Cover Type Z: Approx. 59 kg With DADF-AZ1: Approx. 65 kg
PRINT SPECIFICATIONS	
Print Speed (BW)	iR2745: Simplex: Up to 45 pages/min (A4, A5, A5R, A6R), Up to 22 pages/min (A3), Up to 32 pages/min (A4R) iR2735: Simplex: Up to 35 pages/min (A4, A5, A5R, A6R), Up to 17 pages/min (A3), Up to 23 pages/min (A4R) iR2730: Simplex: Up to 30 pages/min (A4, A5, A5R, A6R), Up to 15 pages/min (A3), Up to 20 pages/min (A4R) iR2725: Simplex: Up to 25 pages/min (A4, A5, A5R, A6R), Up to 15 pages/min (A3), Up to 20 pages/min (A4R)
Print Resolution (dpi)	600 x 600, 1200 x 1200
Page Description Languages	Standard: UFR II Option: PCL6, Adobe® PostScript®3™
Direct Print	PDF, EPS, TIFF/JPEG, XPS
Printing from mobile and cloud applications	AirPrint, Mopria, Canon PRINT Business, uniFLOW Online and Universal Print
Fonts	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T ¹ (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts ² ¹ : Optional PCL International Font Set-A1 is required. ² : Optional Barcode Printing Kit-D1 is required.
Operating System	UFR II: Windows® 8.1/10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022, Mac OS X (10.11 or later) PCL: Windows® 8.1/10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022 PS: Windows® 8.1/10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022, Mac OS X (10.11 or later) PPD: Windows® 8.1/10/11, Mac OS X (10.11 or later)
COPY SPECIFICATIONS	
Copy Speed	iR2745: Simplex: Up to 45 pages/min (A4, A5, A5R, A6R), Up to 22 pages/min (A3), Up to 32 pages/min (A4R) iR2735: Simplex: Up to 35 pages/min (A4, A5, A5R, A6R), Up to 17 pages/min (A3), Up to 23 pages/min (A4R) iR2730: Simplex: Up to 30 pages/min (A4, A5, A5R, A6R), Up to 15 pages/min (A3), Up to 20 pages/min (A4R) iR2725: Simplex: Up to 25 pages/min (A4, A5, A5R, A6R), Up to 15 pages/min (A3), Up to 20 pages/min (A4R)
First-Copy-Out Time (A4)	iR2745: 5.3 s iR2735: 6.4 s iR2730: 7.0 s iR2725: 7.0 s

Copy Resolution (dpi)	600 x 600
Multiple Copies	Up to 9 999 copies
Copy Density	Automatic or Manual (9 Levels)
Magnification	Variable zoom: 25% to 400% (1% Increments) Preset reduction/enlargement (Others): 25%, 50%, 61%, 70%, 81%, 86%, 100% (1:1), 115%, 122%, 141%, 200%, 400%
SCAN SPECIFICATIONS	
Document Feeder Paper Capacity (80g/m ² (gsm))	DADF-BA1: up to 100 Sheets DADF-AZ1: up to 50 Sheets
Acceptable Originals and Weights	Platen: Sheet, Book and 3-Dimensional objects Document Feeder media weight: DADF-BA1: 1-sided scanning: 38 to 128g/m ² (gsm) (BW), 64 to 128g/m ² (gsm) (CL) 2-sided scanning: 50 to 128g/m ² (gsm) (BW), 64 to 128g/m ² (gsm) (CL) DADF-AZ1: 1-sided scanning: 38 to 128g/m ² (gsm) 2-sided scanning: 52 to 128g/m ² (gsm) Platen: max. scanning size: 297.0 x 431.8 mm
Supported Media Sizes	DADF-BA1: A3, A4, A4R, A5, A5R, B4, B5, B5R, B6, Custom size: 139.7 x 128.0 mm to 297.0 x 431.8 mm DADF-AZ1: A3, A4, A4R, A5, A5R, B5, B5R, B4R Custom size: 128.0 x 148.0 mm to 297.0 x 431.8 mm
Scan Speed (image per minute (ipm): BW/CL, A4)	DADF-BA1: 1-sided Scanning: 70/70 (300 x 300 dpi, send), 51/51 (600 x 600 dpi, copy) 2-sided Scanning: 35/35 (300 x 300 dpi, send), 25.5/25.5 (600 x 600 dpi, copy) DADF-AZ1: 1-sided Scanning: 35/25 (300 x 300 dpi, send), 25 (BW; 600 x 600 dpi, copy) 2-sided Scanning: 12/8 (300 x 300 dpi, send), 8 (BW; 600 x 600 dpi, copy)
Scan Resolution (dpi)	Scan for Copy: 600 x 600 Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) 600 x 600 Scan for Fax: 600 x 600
Pull Scan Specifications	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows® 8.1/10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022
SEND SPECIFICATIONS	
Destination	Standard: E-mail/Internet FAX (SMTP), SMB3.0, FTP, WebDAV Optional: Super G3 FAX
Address Book	LDAP (2 000)/Local (1 600)/One-touch (200)
Send Resolution (dpi)	Push: up to 600 x 600, Pull: up to 600 x 600
Communication Protocol	FTP (TCP/IP), SMB3.0 (TCP/IP), WebDAV Email/Fax: SMTP(send), POP3(receive)
File Format	Standard: TIFF (MMR), JPEG*, PDF (Compact, Searchable, PDF/A-1b, Encrypted), XPS (Compact, Searchable), PDF/XPS (Device Signature), Office Open XML (PowerPoint, Word) Optional: PDF (Trace & Smooth), PDF/XPS (User Signature) [*] Single page only
FAX SPECIFICATIONS	
Optional/ Standard	Optional on all models
Maximum Number of Connection Lines	1
Modem Speed	Super G3: 33.6 kbps, G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution (dpi)	200 x 100 (Standard), 200 x 200 (Fine), 200 x 400 (Super Fine), 400 x 400 (Ultra Fine)
Sending/Recording Size	Sending: A3, A4, A4R, A5 ¹ , A5R ¹ , B4, B5 ¹ , B5R ¹ Receiving: A3, A4, A4R, A5R, B4, B5, B5R ¹ : Sent as A4. ² : Sent as B4 short.
FAX Memory	Up to 30 000 pages (2 000 jobs)
Speed Dials	Max. 200
Group Dials/Destinations	Max. 199 dials
Sequential Broadcast	Max. 256 addresses
Memory Backup	Yes
STORE SPECIFICATIONS	
Memory Media	Scan to Memory Media
ENVIRONMENTAL SPECIFICATIONS	
Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80% RH (Relative Humidity)
Power Source	Asia: 220-240V 50/60Hz 10A Maximum: Approx. 1.500W Copying (with DADF continuous scan): Approx. 666W (220-240V) ¹ Standby: Approx. 28.1W (220-240V) ¹ Sleep Mode: Approx. 1.0W ²
Power Consumption	¹ : Reference value: measured one unit. ² : 1.0W is not available in all circumstances due to certain settings.
PAPER SUPPLY OPTIONS	
Cassette Feeding Unit-AW1	Paper Capacity: 550 sheets x 2 (1100 sheets) (80g/m ² (gsm)) Paper Type: Thin, Plain, Recycled, Colour, Heavy, Bond, Transparency, Pre-punched, Letterhead Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom Size: 105.0 x 148.0 mm to 304.8 x 457.2 mm Paper Weight: 52 to 256g/m ² (gsm) Power Source: From the Main Unit Dimensions (W x D x H): 565.0 x 635.0 x 248.0 mm Weight: Approx. 16.0 kg
OTHER ACCESSORIES AND SUPPLIES	
DADF-AZ1, DADF-BA1, Platen Cover Type Z, Platen Cover-Y3, Utility Tray-B1, Inner 2way Tray-M1, Copy Tray-T2, Inner Finisher-L1, Inner 2/3 Hole Puncher-D1, Inner 4 Hole Puncher-D1, Copy Card Reader-F1, Copy Card Reader Attachment-H3, IC Card Reader Attachment-B4, Option Attachment kit for Reader-A2, PCL International Font Set-A1, PS Printer Kit-B1, Barcode Printing Kit-D1, Universal Send Trace & Smooth PDF Kit-A1, Universal Send Digital User Signature Kit-C1, Copy Control Interface Kit-D1, Super G3 FAX Board-BJ1, Remote Fax Kit-A1, ADF Access Handle-A1, Staple-P1	

To arrange for a demonstration, simply contact:

CANON INDIA PVT. LTD.

7th Floor, Tower B, Building #5, DLF Epitome Building, DLF Phase III, Gurugram-122002
Ph.: 0124-4160000 | Fax: 0124-4160011 | Web: in.canon

This document is for information purpose only and the contents are subject to change without notice. Product options, name and availability may vary by regions. Nothing in this document should be construed as a warranty. We expressly disclaim any liability or contractual obligations with respect to this document. Canon and Business Can Be Simple are trademarks of Canon Inc, and/or its affiliates. Other names may be the trademarks for their respective owners.

O227W460 @ 2022 Canon India Pvt. Ltd. All rights reserved. Printed in India.

DEALER'S STAMP