

PIXMA Ink Efficient G2730





Multifunction Refillable Ink Tank Printer with Low-Cost Ink Bottles

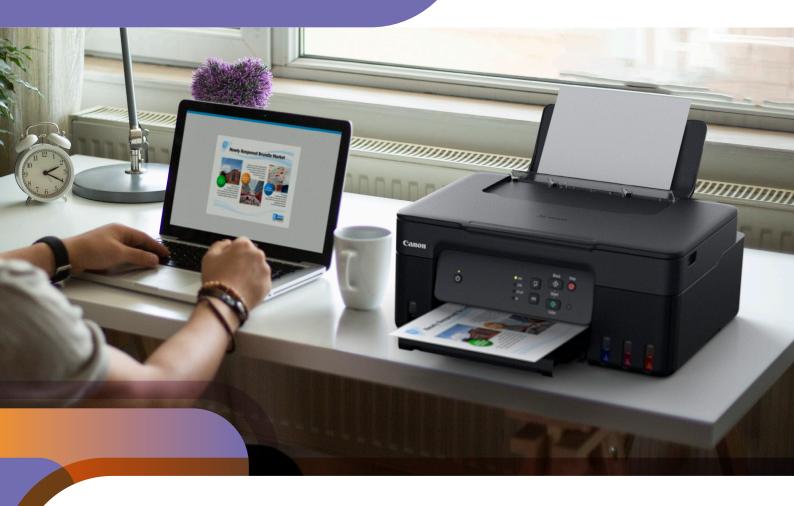









COMPATIBLE LOW-COST INK BOTTLES

Small and standard ink bottles are available to meet the different requirements in print volume.

*Published highest yield is achievable based on Standard ink bottle and printing on Economy mode. For more details, refer to specifications on underside of leaflet.



EASY, HASSLE-FREE INK REFILLING

Ink refilling is now made easy. Each ink bottle nozzle is designed to fit seamlessly only into the designated ink tank, eliminating potential mixing accidents.



EASY MAINTENANCE

The easy-to-replace maintenance cartridge makes maintenance fuss-free and extends the printer's lifespan even when printing in high volumes.



COMPACT, SPACE SAVING FOOTPRINT

The printer's compact footprint allows it to fit into tight spaces with ease.



SPECIFICATIONS / PIXMA G2730				
	Maximum Printing Resolution'			4800 (horizontal) x 1,200 (vertical) dpi
PRINT	Print Speed ²	ESAT/Simplex (Mono/Colour)		11 / 6 ipm
		FPOT Ready/Simplex (Mono/Colour)		9 / 14 sec
		Photo (4 x 6")		45 sec
SCAN ⁻³	Scanner Type			Flatbed
	Scanning Method			Contact Image Sensor (CIS)
	Optical Resolution' ⁴			600 x 1,200 dpi
	Maximum Document Size			A4, LTR (216 x 297 mm)
COPY	Copy Speed ¹⁵	Colour	sFCOT/Simplex	23 sec
			sESAT/Simplex	2.7 ipm
	Maximum Copies			99 pages
	Maximum Document Size			A4, LTR
PAPER HANDLING	Maximum Input	Plain Paper (64 g/m²)		Up to 100 sheets
	Capacity	Photo Paper (4 x 6")		Up to 20 sheets
	Media Size			A4, A5, A6, B5, LTR, LGL, Executive, Legal, Foolscap, F4, Oficio2, B-Oficio, M-Oficio, Envelope (COM10, DL, C5, Monarch), Card Size (91 x 55 mm), 4 x 6", 5 x 7", 7 x 10", 8 x 10", Square (80 x 89 mm, 127 x 127 mm), Custom (width: 55 – 216 mm, length: 89 – 1,200 mm)
	Media Type			Plain Paper (64 – 105 g/m²) High Resolution Paper (HR-101N) Photo Paper Plus Glossy II (PP-201, PP-208) Glossy Photo Paper (GP-508) Photo Paper Plus Semi-Gloss (SG-201) Photo Paper Plus Semi-Gloss (SG-201) Photo Paper Pro Luster (LU-101) Matte Photo Paper (MP-101) Double-Sided Matte Paper (MP-101D) Photo Stickers (PS-208/PS-808) Envelope
SYSTEM REQUIREMENTS & GENERAL Specifications	Operating System Compatibility	Please visit https://asia.canon/support to confirm OS compatibility and to download the latest drivers.		Windows 11 / 10 / 8.1 / 7 SP1° macOS 10.14.6 – 12 or later Chrome OS
	Interface			USB 2.0
	Power			AC 100 – 240 V, 50/60 Hz
	Power Consumption ⁷			15 W (Standby: 0.6 W)
	Duty Cycle			Up to 3,000 pages/month
	Recommended Monthly Print Volume			150 – 1,500 pages
	Di	Factory Configuration		416 x 337 x 177 mm
	Dimensions (W x D x H)	Output/ADF Trays Extended		416 x 557 x 268 mm
	Weight			6 kg
CONSUMABLES	Ink Bottles	Size	Standard / Small	GI-71 / GI-71S (Bundled)
		Type/Colours		Pigment Ink / Black Dye-Based Ink / Cyan, Magenta, Yellow
		Page Yield's (Plain Paper: A4, Pages)		GI-71 PGBK: 6,000 (Standard) / 7,600 (Economy ®) GI-71 C, M, Y: 7,700 (Standard) / 8,100 (Economy ®
				GI-71S PGBK: 3,100 (Standard) / 3,900 (Economy ⁹) GI-71S C, M, Y: 4,400 (Standard) / 4,600 (Economy ⁹)
		Page Yield's [Photo Paper, PP-201 (4 x 6"), Sheets]		GI-71 PGBK: NA ¹⁰ GI-71 C, M, Y: 2,200
				GI-71S PGBK: NA ^{**} GI-71S C, M, Y: 1,200
	User Replaceable Maintenance Cartridge			MC-G04

Specifications are subject to change without notice.

- 1 Ink droplets can be placed with a pitch of 1/4800 inch at minimum.
- Document print speeds are the averages of ESAT (Word, Excel, PDF) in Office Category Test for the default simplex mode, ISO/IEC 24734.
 Photo print speed is based on the default setting using ISO/JIS-SCID N2 on Photo Paper Plus Glossy II and does not take into account data processing time on host computer.
 Print speed may vary depending on system configuration, interface, software, document complexity, print mode, page coverage, type of paper used etc.
- ^{*3} TWAIN driver (ScanGear) is based on the TWAIN specification V1.9 and requires the Data Source Manager comes with the operating system.
- 4 Optical resolution is a measure of maximum hardware sampling resolution, based on ISO 14473 standard. Optical resolution scan is available, only when you use TWAIN Driver.
- Opy speeds are the average of sFCOT and sESAT, ISO/IEC 29183. Copy speeds (ADF) are ESAT of copy in sequence, ISO/IEC24735.
 Copy speed may vary depending on document complexity, copy mode, page coverage, type of paper used etc. and does not take into account warm up time.
- ¹⁶ Operation can only be guaranteed on a PC with a pre-installed Windows 7 or later.
- *7 When copying ISO/JIS-SCID N2 (printed by inkjet printer) on A4 size plain paper using default settings.
- *8 Page Yield is the estimated value based on Canon individual test method using the ISO/IEC 24712 colour chart and continuous printing simulation with the replacement after initial setup. Package contains GI-71S (black, cyan, magenta and yellow) ink bottles.
- '9 The Economy mode reduces the ink consumption by lowering the density. More pages can be printed than the standard mode.
- ¹⁰ Black ink is not used when printing under this condition. However, a minimal amount of black ink is used for maintenance purpose.



SOUTH AND SOUTHEAST ASIA REGIONAL HEADQUARTERS CANON SINGAPORE PTE. LTD.

1 Fusionopolis Place, #14-10 Galaxis, Singapore 138522 Tel: 65-6799-8888 | Fax: 65-6799-8882 | https://asia.canon

DEALER'S STAMP

This document is for information purpose only. The contents are subject to change without notice. Product options, name and availability may vary by regions. We expressly disclaim any liability or contractual obligations with respect to this document. Brands and product names are trademarks and/or registered trademarks of their respective owners.